



DRAUGHT EXCLUSION




Exclusively made by The Original Box Sash Window Company in natural or colour-coded timber, SASHSEAL™ blocks draughts and damp air from outside, and stops noise and dust penetration.

The combination of specific control strips is fitted by our experts quickly and effectively. SASHSEAL™ has the added benefit of assisting the sashes to slide more easily than before. We always also fit new cords and adjust the weights.

The illustrations below show typical character windows and doors where our SASHSEAL™ has been used, maintaining the original appearance.

Note: "SASHSEAL™" is the Registered Trade Mark of The Original Box Sash Window Co. For clarity, the SASHSEAL'S™ have been highlighted in red on the illustration (left).

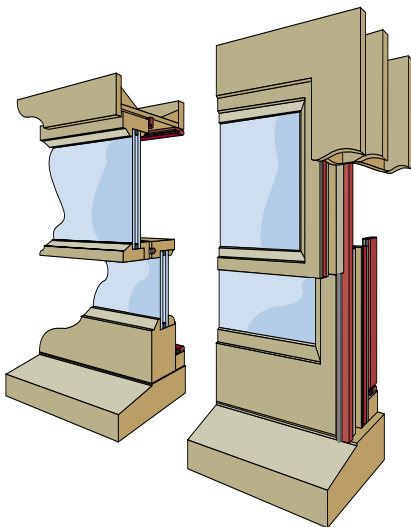

SPECIFICATION

Materials

Timber - Finest grades.

Seals - nylon, in plastic track holder (hidden in timber).

All our materials are selected with great care, so as to blend in completely with the original window or door design.

Finishes

Timber - natural, white, or colour coded.

Seals - white

To match your windows and doors.

Originality Factor

All beads are moulded in the traditional profiles, then mitred and pinned using traditional crafts.

Total Quality Assurance

BS EN ISO 9002
(Successor to BS 5750).

Insulation

The movement of air through normal apertures when window is in a closed position is reduced by approximately 95%. Noise, cold, dust passage is greatly restricted.

Performance

Windows and doors with The Original Box Sash Window Company SASHSEAL™ meets the following standards:

B.S. 6375 & B.S. 5368 part 1,
Air permeability.

B.S. 6375 & B.S. 5368 part 2,
Water tightness.

B.S. 6375 & B.S. 5368 part 3,
Wind resistance, strength
and safety.

Design

Period style profile beads.

The seals and holders are rendered unobtrusive by positioning in a channel on the opposite side of the bead from the normal point of vision.

Weather Protection

Three coats of micro-porous paint are factory applied by airless spray.

Maintenance

Timber external - Bi-annual inspection, re-coat when necessary.

Timber internal - Touch up or wax as necessary.

Seals: Clean with weak solution of warm water and washing-up liquid to remove airborne dust and dirt, as necessary.

There is virtually no regular maintenance requirement, except normal cleaning.

Supply

Bespoke, made to order only.

SASHSEAL™ is integrally fitted to all Original Box Sash Window Company products, as standard.

SASHSEAL™ can be fitted to customer's existing windows.

Services

Consultation and advice over the phone, or by appointment.


Best Advice Report and fixed price Quotation.

"Like-for-Like" for Listed Buildings.

Installation.

Individual Customer's specification stored on database (Total Quality Assurance).

Finance arranged (licensed Credit Brokers - written details on request).

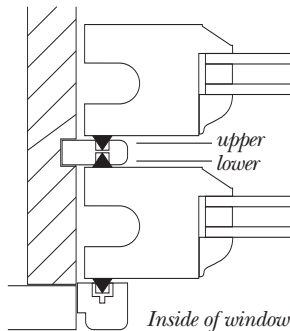

The position of the nylon seals in a refurbished box sash

Note: The Company's policy is one of continual improvement and refinement and the Company reserves the right to change specifications without notice. Final specification will be contained in the contract between the Company and the Customer which always takes precedence over this information sheet.

© 2007. All pictures from the Company's Jobs Library.